



The new generation scintillator / Sipi detectors

- Compact
- Low power (5 V , < 5 mA)
- Built-in temperature compensated bias generator / preamplifier
- PMT readout comparable energy resolution
- Wide choice of scintillator

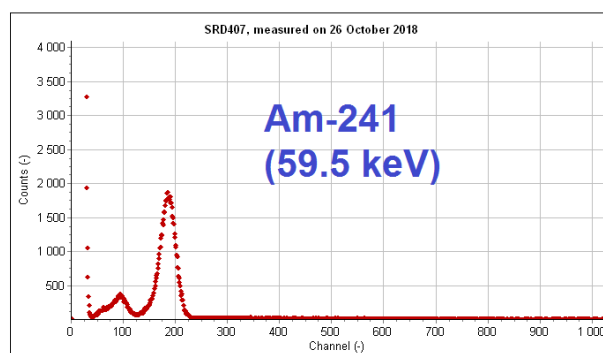

The currently available silicon photomultipliers allow the design of compact low power sensors applicable in numerous applications. With a careful choice of the number of SiPms per scintillation crystal, the energy resolution and noise can be tuned / managed within the desired temperature range. Some examples of energy spectra are shown below.


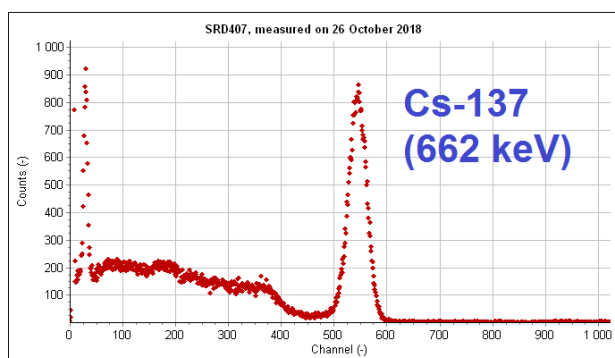


Nal(Tl)



Last revision : 25-10-2022
 Revision nr : 0
 Doc. name : New generation application note

Scionix Holland B.V.
 Regulierenring 5
 3981 LA Bunnik
 The Netherlands

Tel: + 31 30 657 03 12
 Fax: +31 30 656 75 63
 Website: www.scionix.nl
 E-mail: sales@scionix.nl

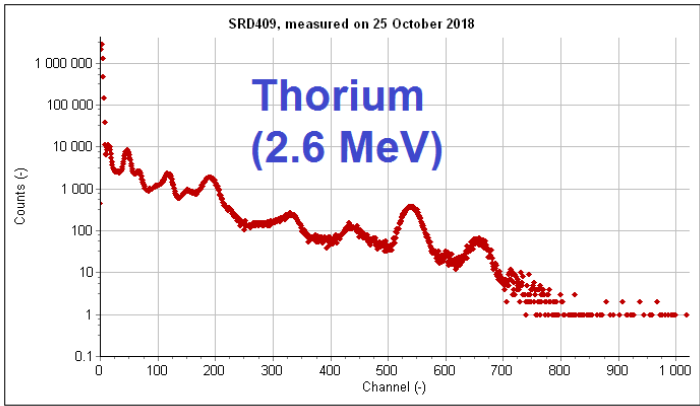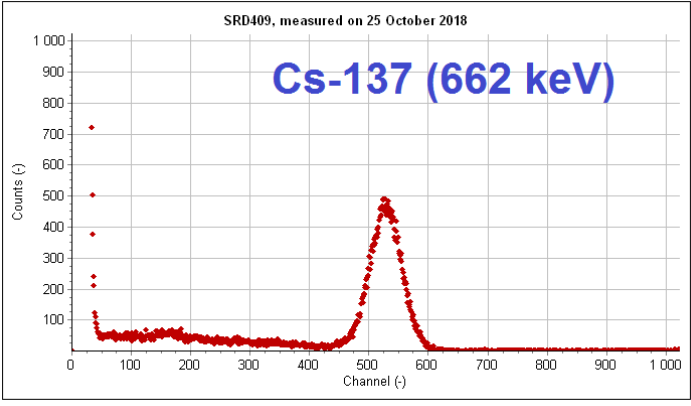

BGO

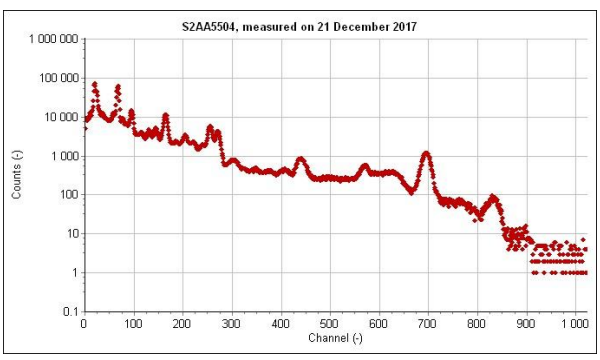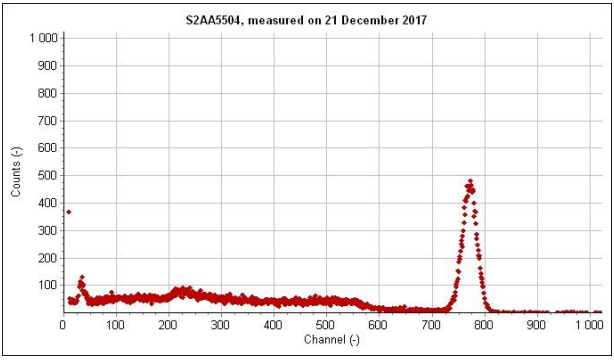

CeBr₃

Ask us for more information !

Last revision : 25-10-2022
 Revision nr : 0
 Doc. name : New generation
 application note

Scionix Holland B.V.
Regulierering 5
3981 LA Bunnik
The Netherlands

Tel: + 31 30 657 03 12
 Fax: +31 30 656 75 63
 Website: www.scionix.nl
 E-mail: sales@scionix.nl